


Oct.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

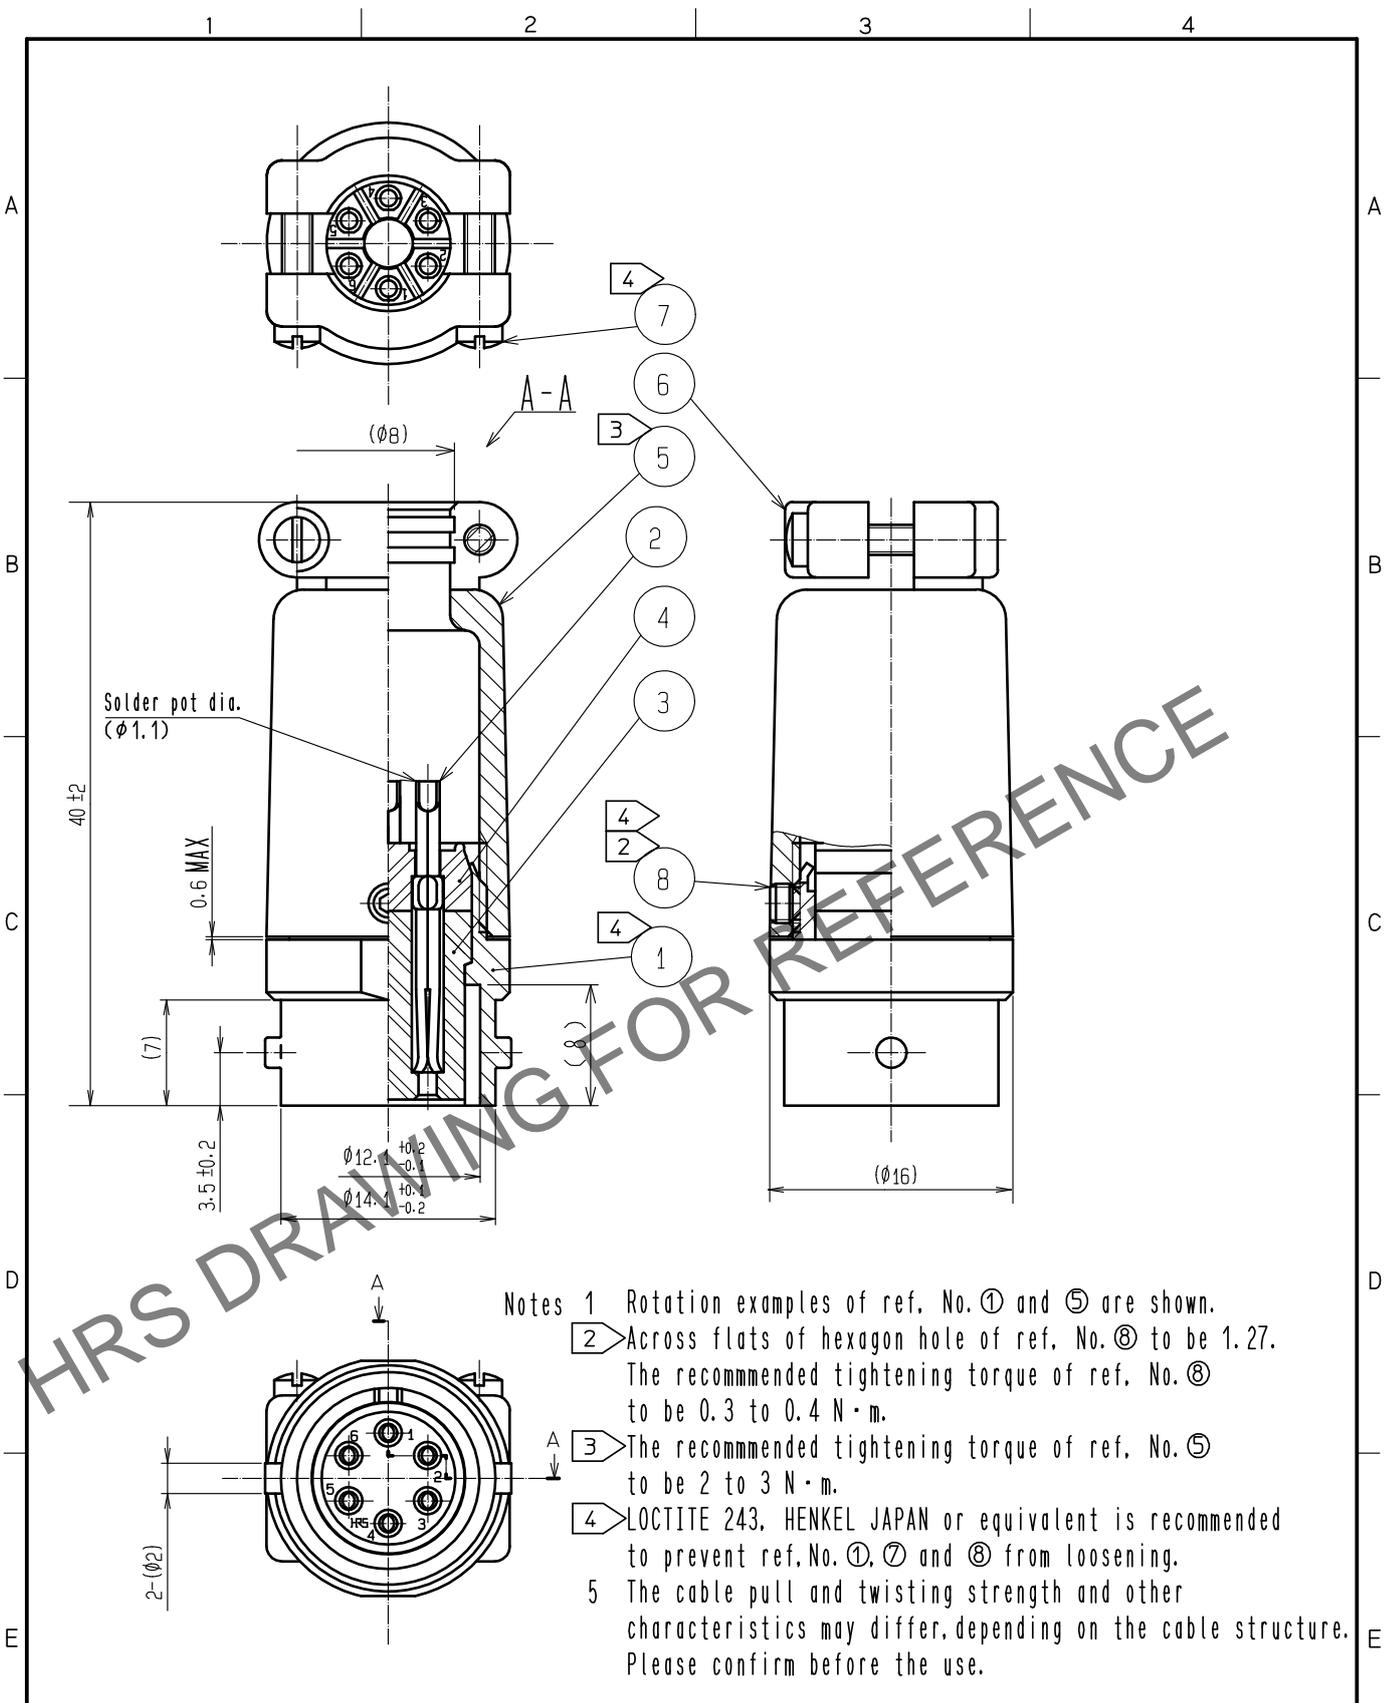

- Notes
- 1 Rotation examples of ref. No. ① and ⑤ are shown.
 - 2 Across flats of hexagon hole of ref. No. ⑧ to be 1.27. The recommended tightening torque of ref. No. ⑧ to be 0.3 to 0.4 N·m.
 - 3 The recommended tightening torque of ref. No. ⑤ to be 2 to 3 N·m.
 - 4 LOCTITE 243, HENKEL JAPAN or equivalent is recommended to prevent ref.No. ①, ⑦ and ⑧ from loosening.
 - 5 The cable pull and twisting strength and other characteristics may differ, depending on the cable structure. Please confirm before the use.

4	PPS	(BLACK) UL94V-0	8	STEEL	NICKEL PLATING	Hexagon socket set screws M2, 6×0.45×2
3	PPS	(BLACK) UL94V-0	7	BRASS	NICKEL PLATING	
2	COPPER ALLOY	SILVER PLATING 5μm min	6	ZINC ALLOY	MATTE FINISH NICKEL PLATED	
1	ZINC ALLOY	MATTE FINISH NICKEL PLATED	5	ZINC ALLOY	MATTE FINISH NICKEL PLATED	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS	

UNITS mm		SCALE 2 : 1	COUNT 	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
HIROSE ELECTRIC CO., LTD.				APPROVED :HY. KOBAYASHI 15.11.19 CHECKED :HY. KOBAYASHI 15.11.19 DESIGNED :KN. IKEHARA 15.11.19 DRAWN :KN. IKEHARA 15.11.19	DRAWING NO. EDC-006812-81-00 PART NO. RM12BJB-6S(81) CODE NO. CL109-0642-3-81		