

RoHS Compliant

REV	SIGN	DATE	DESCRIPTION	APPROVER
A0		2024.06.20	Initial Release	LENA

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!





Material:

- Item (a) Terminal upper body: PA66,
- Item (b) Terminal bottom body: PA66,
- Item (c) Terminal lever: PBT
- Item (d) Terminal Contact: Copper alloy
- Item (e) Spring: Stainless,

Electrical:

UL1059 Group B

- Voltage rating: 300 V
- Current rating: 20A
- Wire range:
 - Solid wire: 24-12AWG
 - Stranded wire: 24-12AWG
- Wire strip length: 11 mm
- Operating temperature: -40°C to +105°C
- Assembling temperature: -5°C to +105°C
- Safety Approval:

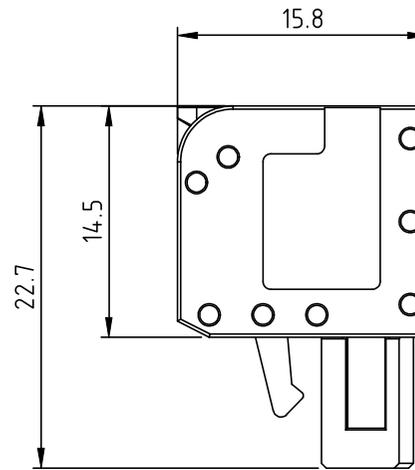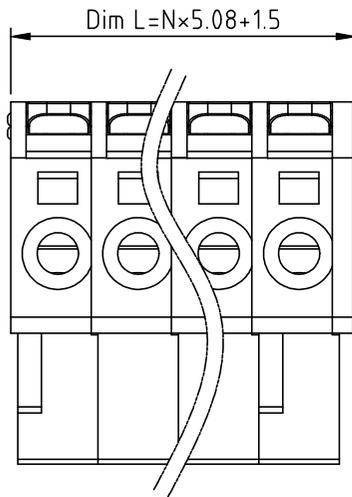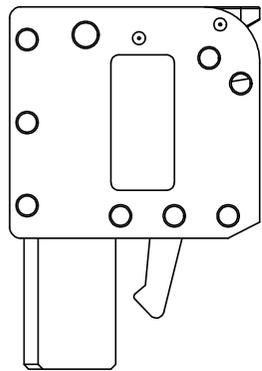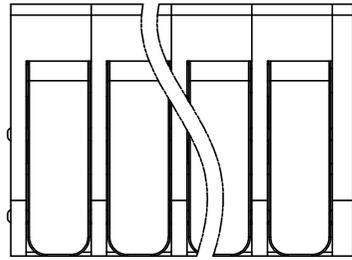

Part No. PL xx 5 x x S V xxxx G

NO. OF POLES
02: 2 POLES
03: 3 POLES
12: 12 POLES

Body color
0 Black
1 natural color
2. Red
3. Orange
4. Yellow
5 Green (RAL6018/T)
6 Blue
8 Grey (標準色)
9 White
C: Green (RAL 6018/U)


Lever color
0 Black
1 natural color
2. Red
3. Orange
4. Yellow
5 Green (RAL6018/T)
6 Blue
8 Grey (標準色)
9 White
C: Green (RAL 6018/U)

RoHS compliant (lead<4%) in copper Alloy

00x0: "@" Logo (Standard)
Any special item by customer request, please contact sales department.

N=number of poles

DIM	TOL	
	2P-5P	6P-10P
Dim A	±0.15	±0.20
Dim B	±0.15	±0.20

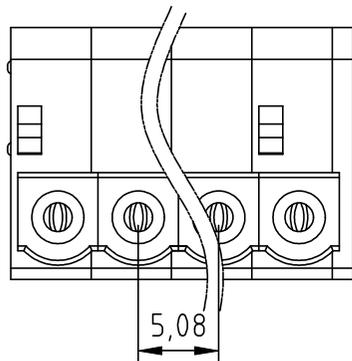

Amphenol		CUSTOMER COPY	
ANYTEK		<small>ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD</small>	
TITLE	PL 5.08 series 2P-12P terminal block,90° wire insertion, without flange		
PART NO.	PLxx5xxSVxxxxG	DWG NO.	8PL0004
APPROVED	CHECKED	DESIGNED	DRAWN
		Lena 2024.06.20	Lena 2024.06.20
		UNIT: mm SCALE: 2:1 SHEET: 01/01 REV: A0	
		Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1°	