



Feb.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.  
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

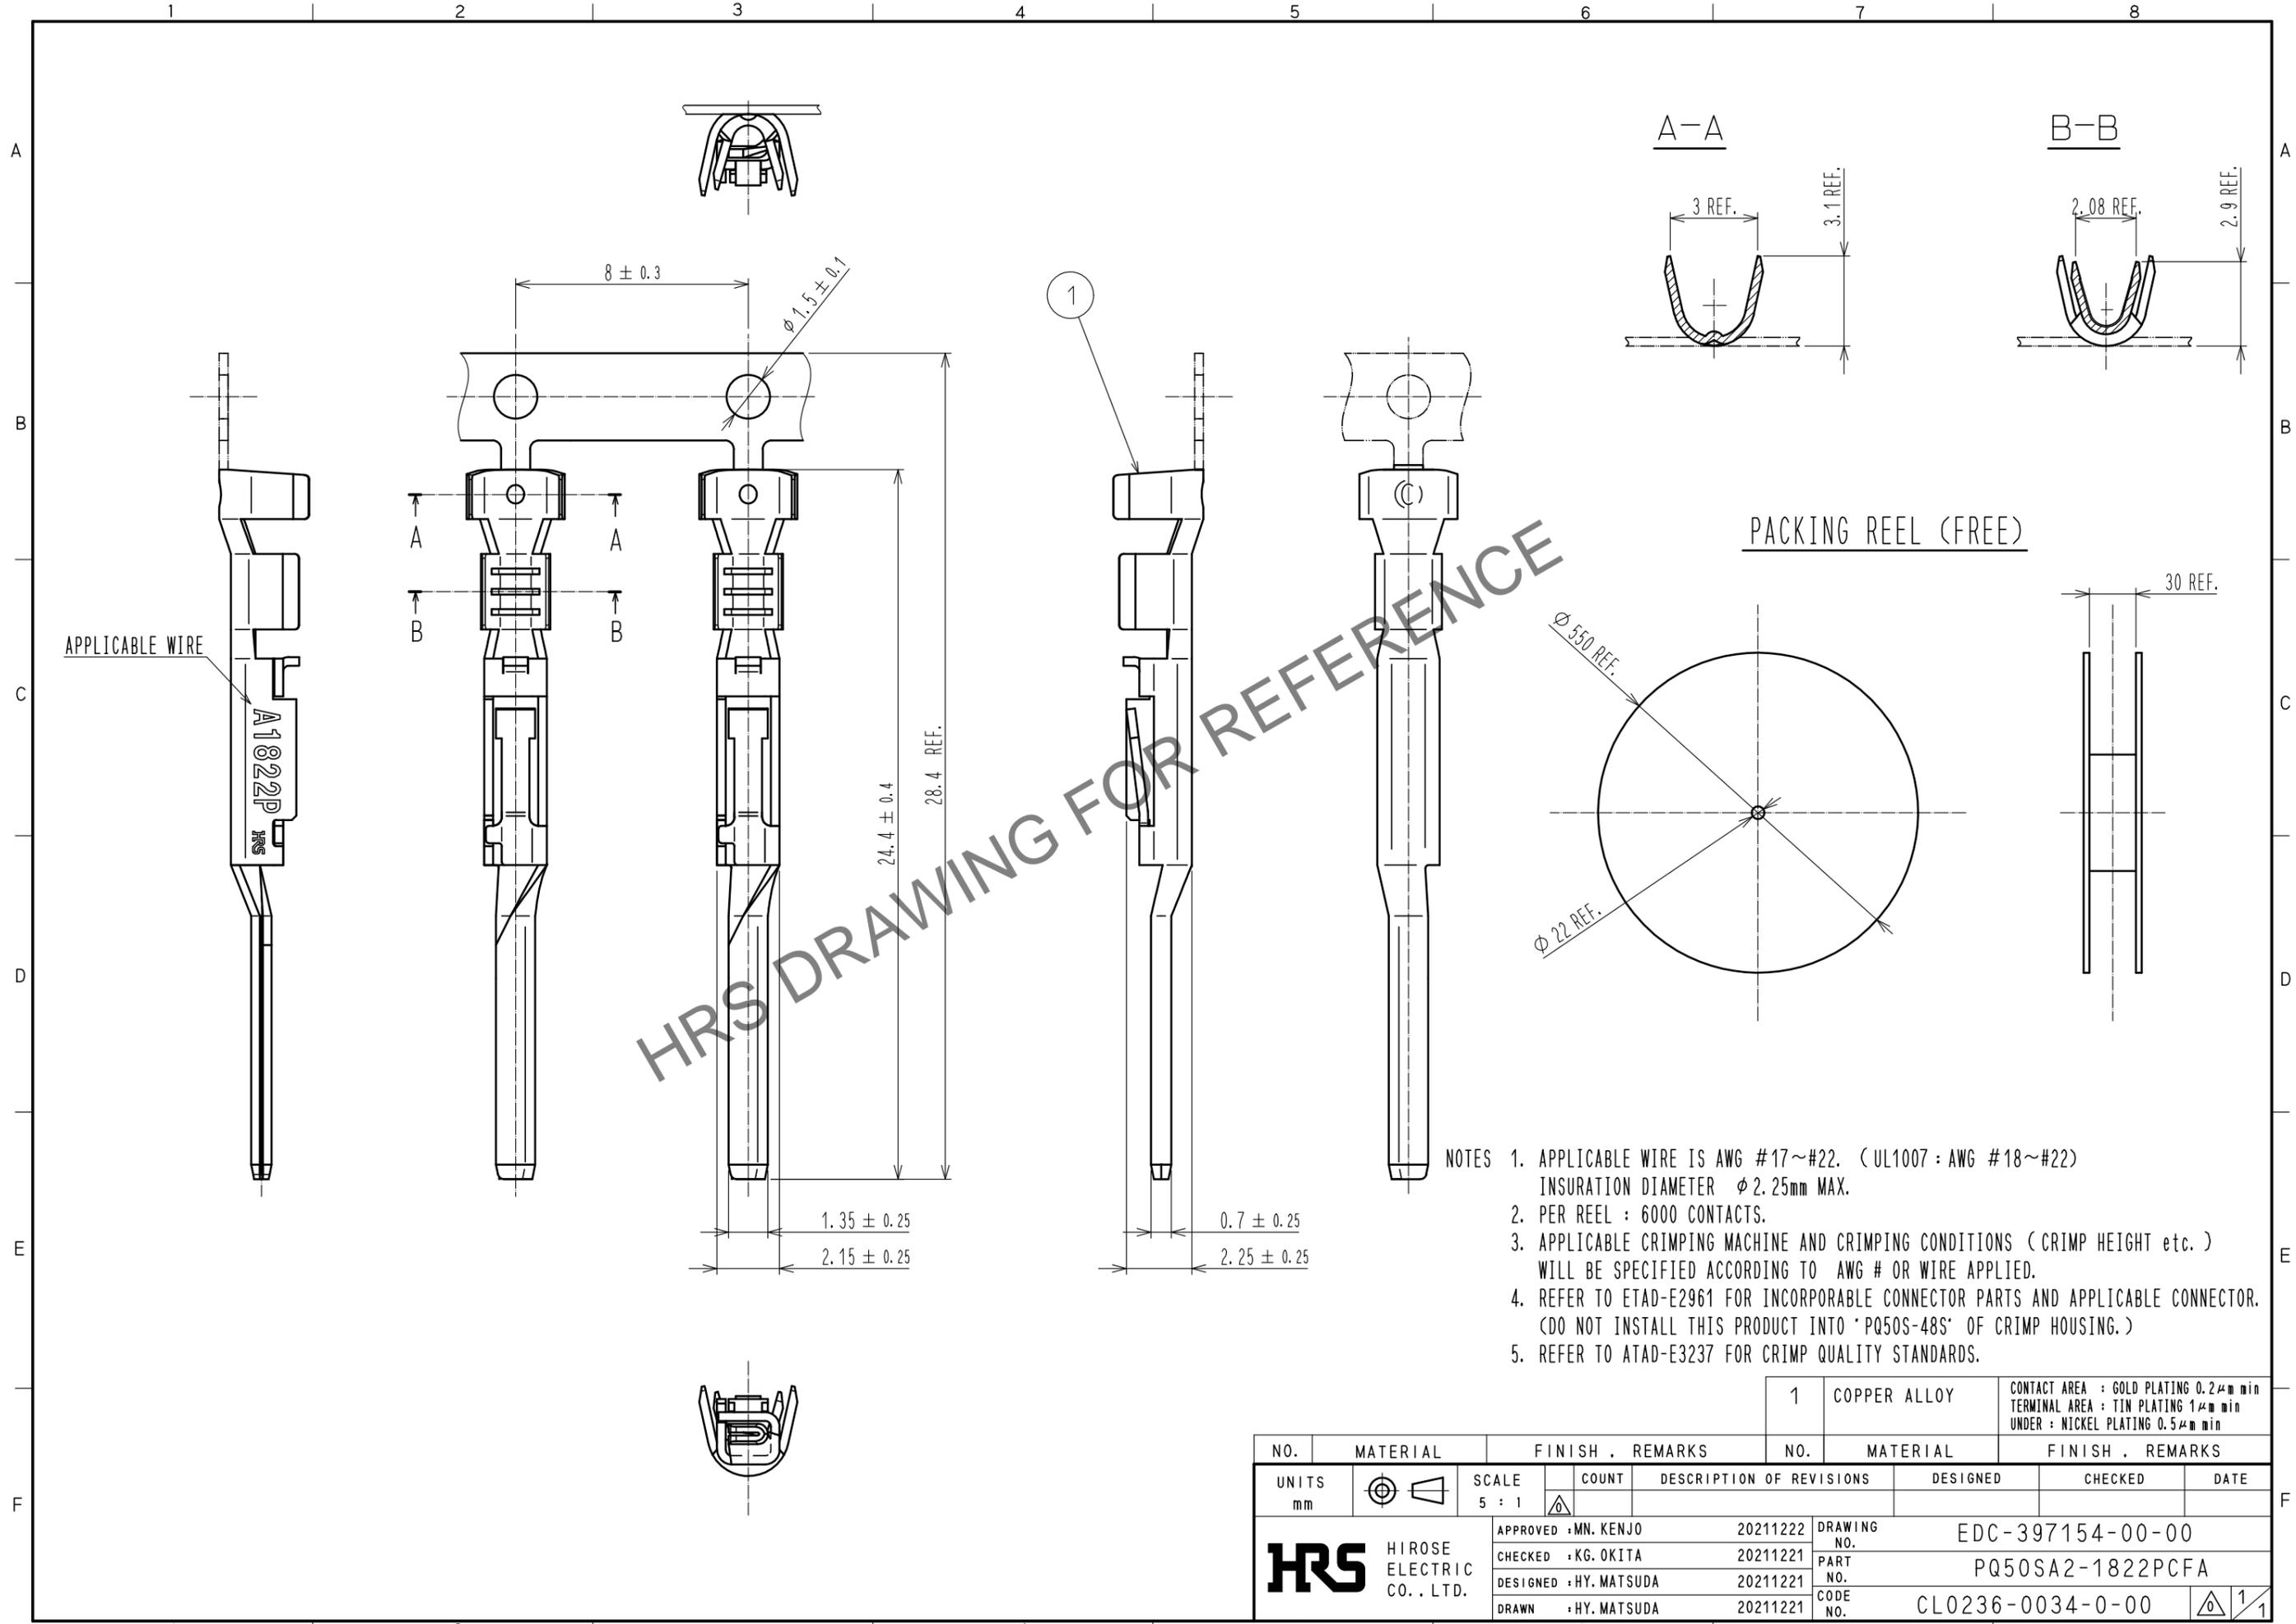

- NOTES
1. APPLICABLE WIRE IS AWG #17~#22. (UL1007 : AWG #18~#22)  
INSURATION DIAMETER  $\phi$  2.25mm MAX.
  2. PER REEL : 6000 CONTACTS.
  3. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO AWG # OR WIRE APPLIED.
  4. REFER TO ETAD-E2961 FOR INCORPORABLE CONNECTOR PARTS AND APPLICABLE CONNECTOR. (DO NOT INSTALL THIS PRODUCT INTO "PQ50S-48S" OF CRIMP HOUSING.)
  5. REFER TO ATAD-E3237 FOR CRIMP QUALITY STANDARDS.

PACKING REEL (FREE)

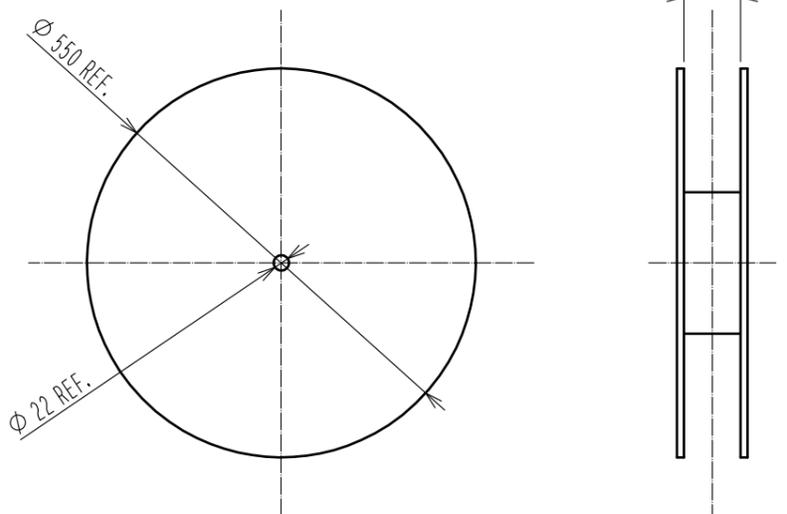

NO.		MATERIAL		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
		1		COPPER ALLOY				CONTACT AREA : GOLD PLATING 0.2 $\mu$ m min TERMINAL AREA : TIN PLATING 1 $\mu$ m min UNDER : NICKEL PLATING 0.5 $\mu$ m min			
UNITS		SCALE	COUNT	DESCRIPTION OF REVISIONS				DESIGNED	CHECKED	DATE	
mm		5 : 1									
<b>HRS</b>		HIROSE ELECTRIC CO., LTD.		APPROVED : MN. KENJO	20211222	DRAWING NO.		EDC-397154-00-00			
				CHECKED : KG. OKITA	20211221	PART NO.		PQ50SA2-1822PCFA			
				DESIGNED : HY. MATSUDA	20211221	CODE NO.		CL0236-0034-0-00			
				DRAWN : HY. MATSUDA	20211221						