


Sep. 1. 2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

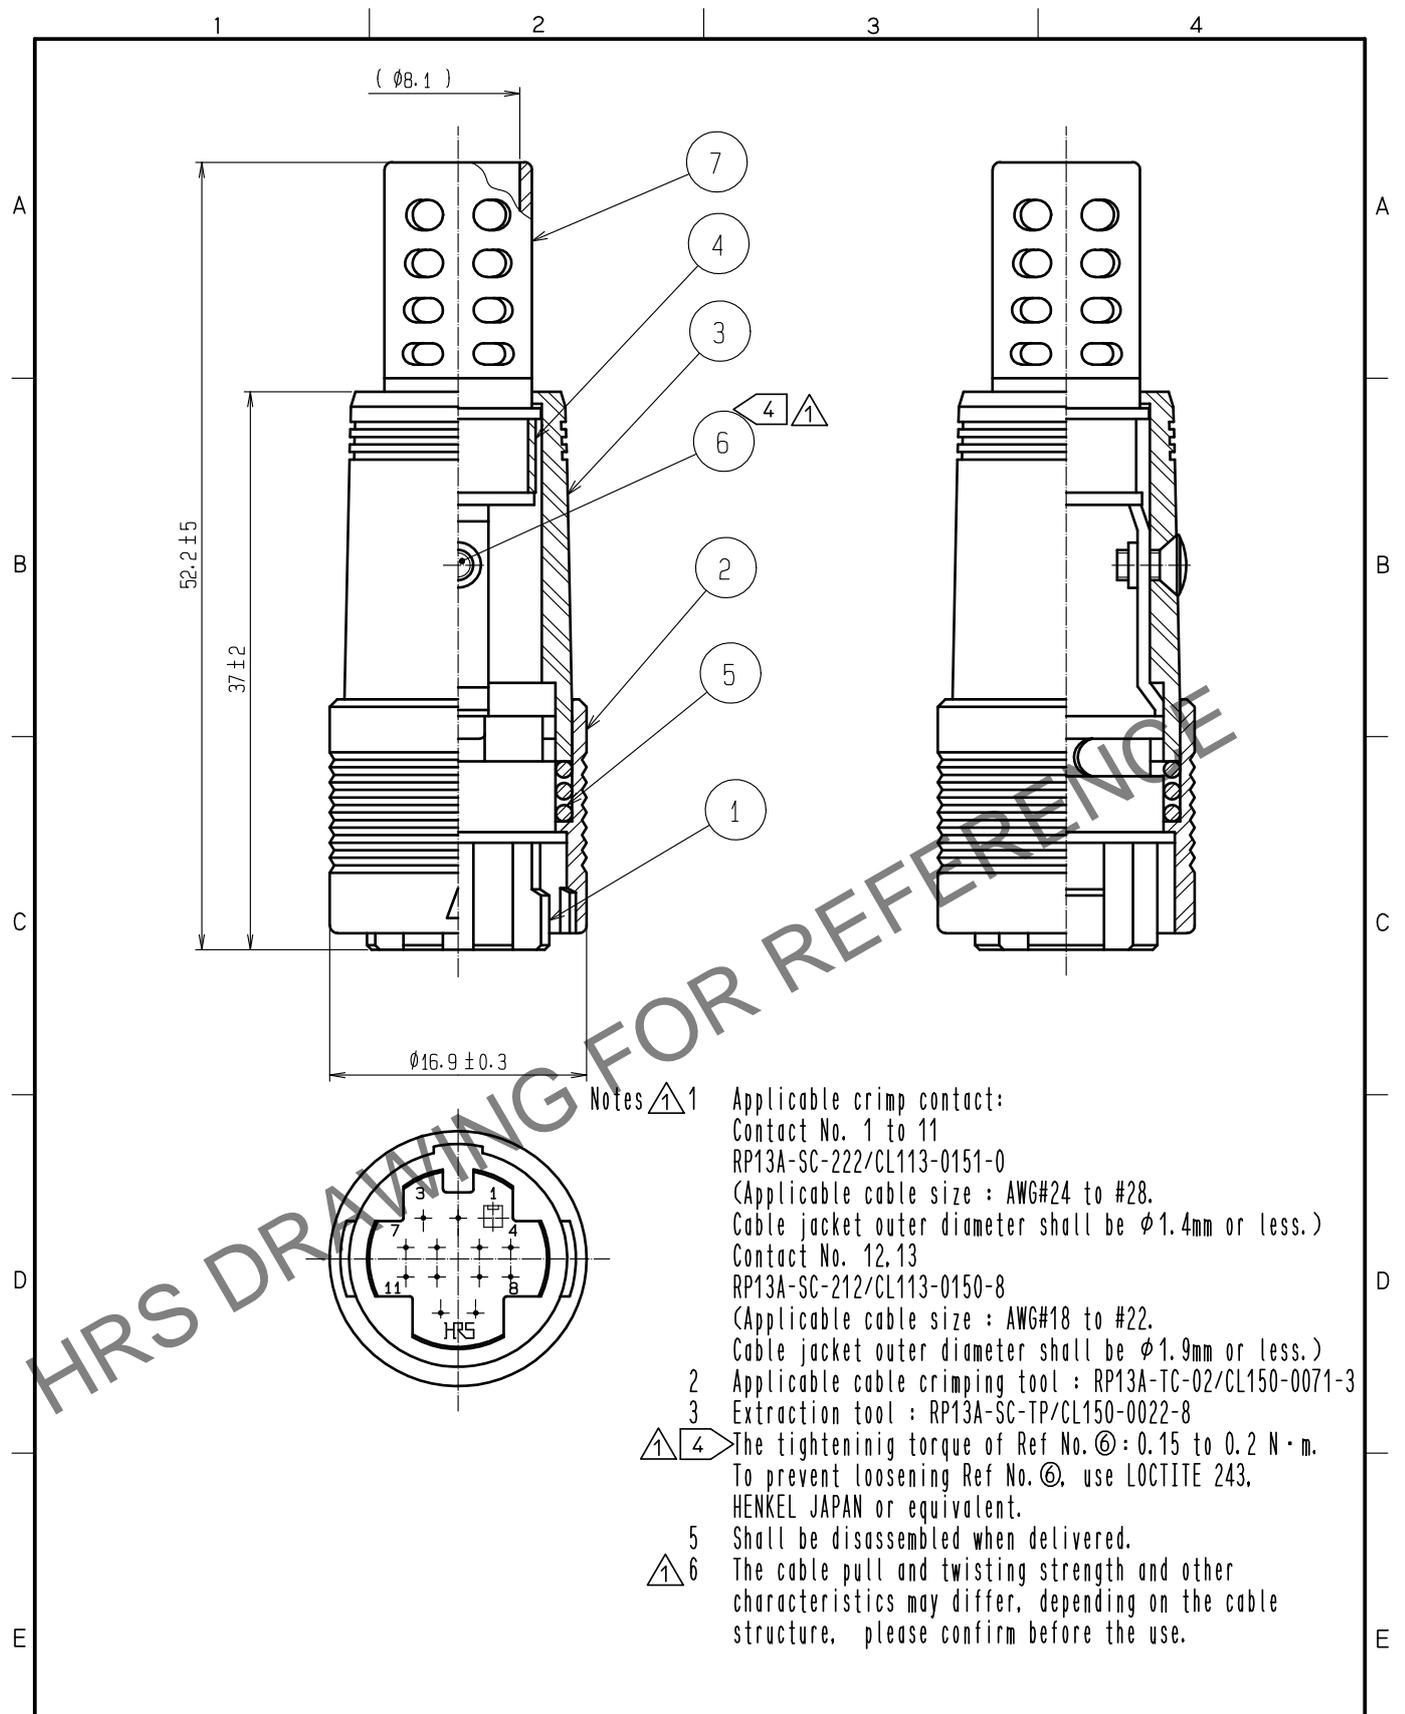

Notes

- ① 1 Applicable crimp contact:
Contact No. 1 to 11
RP13A-SC-222/CL113-0151-0
(Applicable cable size : AWG#24 to #28.
Cable jacket outer diameter shall be ϕ 1.4mm or less.)
Contact No. 12,13
RP13A-SC-212/CL113-0150-8
(Applicable cable size : AWG#18 to #22.
Cable jacket outer diameter shall be ϕ 1.9mm or less.)
- 2 Applicable cable crimping tool : RP13A-TC-02/CL150-0071-3
- 3 Extraction tool : RP13A-SC-TP/CL150-0022-8
- ① ④ The tightening torque of Ref No. ⑥ : 0.15 to 0.2 N·m.
To prevent loosening Ref No. ⑥, use LOCTITE 243,
HENKEL JAPAN or equivalent.
- 5 Shall be disassembled when delivered.
- ① ⑥ The cable pull and twisting strength and other characteristics may differ, depending on the cable structure, please confirm before the use.

4	Brass			7	Polyvinylchloride	(Black)
3	Polycarbonate	(Black)	UL94V-0			
2	Polycarbonate	(Black)	UL94V-0	6	Brass	Black chromete treatment (Trivalent chromium) JIS B 1111 M2X0.4X4
1	Polycarbonate	(Black)	UL94V-0	5	Steel	Nickel plating
NO.	MATERIAL	FINISH	REMARKS	NO.	MATERIAL	FINISH . REMARKS

UNITS mm		SCALE 2 : 1	COUNT ① 4	DESCRIPTION OF REVISIONS DIS-C-00009810	DESIGNED TY. SUZUKI	CHECKED HY. KOBAYASHI	DATE 20220215
HIROSE ELECTRIC CO., LTD. APPROVED : EJ. KUNII 20160323 CHECKED : EJ. KUNII 20160323 DESIGNED : MM. ISHII 20160323 DRAWN : MM. ISHII 20160323				DRAWING NO. EDC-041727-71-00 PART NO. RP13A-12PS-13SC(71) CODE NO. CL0113-1026-4-71			